

UNDERWATER PHOTOGRAMMETRY FOR ARCHAEOLOGY

The VENUS Project Framework

P. Drap¹, D. Scaradozzi², P. Gambogi³ and F. Gauch⁴

¹ *LSIS Laboratoire des Sciences de l'Information et des Systèmes UMR CNRS 6168, France*

² *Interuniversity Centre for Integrated Systems for the Marine Environment (ISME) c/o DIST
Università di Genova, Italy*

³ *SBAT Soprintendenza per i Beni Archeologici della Toscana, Firenze, Italy*

⁴ *COMEX, Compagnie Maritime d'Expertise Marseille, France*

Keywords: Underwater, archaeology, photogrammetry.

Abstract: This article describes on-going developments of the VENUS European Project (Virtual Exploration of Underwater Sites, <http://www.venus-project.eu>) concerning the first mission to sea in Pianosa Island, Italy in October 2006. The VENUS project aims at providing scientific methodologies and technological tools for the virtual exploration of deep underwater archaeological sites. The VENUS project will improve the accessibility of underwater sites by generating thorough and exhaustive 3D records for virtual exploration. In this paper we focus on the underwater photogrammetric approach used to survey the archaeological site of Pianosa. After a brief presentation of the archaeological context we shall see the calibration process in such a context. The next part of this paper is dedicated to the survey: it is divided into two parts: a DTM of the site (combining acoustic bathymetry and photogrammetry) and a specific artefact plotting dedicated to the amphorae present on the site.

1 INTRODUCTION

The VENUS project is funded by European Commission, Information Society Technologies (IST) program of the 6th FP for RTD. It aims at providing scientific methodologies and technological tools for the virtual exploration of deep underwater archaeological sites (Chapman et al., 2006).

Underwater archaeological sites, for example shipwrecks, offer extraordinary opportunities for archaeologists due to factors such as darkness, low temperatures and a low oxygen rate which are favorable to preservation. On the other hand, these sites cannot be experienced first hand and today are continuously jeopardized by activities such as deep trawling that destroy their surface layer.

The VENUS project will improve the accessibility of underwater sites by generating thorough and exhaustive 3D records for virtual exploration.

The project team plans to survey shipwrecks at various depths and to explore advanced methods and

techniques of data acquisition through autonomous or remotely operated unmanned vehicles with innovative sonar and photogrammetry equipment. Research will also cover aspects such as data processing and storage, plotting of archaeological artifacts and information system management. This work will result in a series of best practices and procedures for collecting and storing data.

Further, VENUS will develop virtual reality and augmented reality tools for the visualization of an immersive interaction with a digital model of an underwater site. The model will be made accessible online, both as an example of digital preservation and for demonstrating new facilities of exploration in a safe, cost-effective and pedagogical environment. The virtual underwater site will provide archaeologists with an improved insight into the data and the general public with simulated dives to the site.

The VENUS consortium, composed of eleven partners, is pooling expertise in various disciplines:

archaeology and underwater exploration, knowledge representation and photogrammetry, virtual reality and digital data preservation.

This paper focuses on the first experimentation in Pianosa Island, Tuscany, Italy.

The document is structured as follows. A short description of the archaeological context, then the next section explains the survey method: calibration, collecting photographs using ROV and divers, photographs orientation and a particular way to measure amphorae with photogrammetry using archaeological knowledge. A section shows 3D results in VRML and finally we present the future planned work.

2 THE UNDERWATER ARCHAEOLOGICAL SITE OF PIANOSA ISLAND

The underwater archaeological site of *Pianosa*, discovered in 1989 by volunteer divers (Giuseppe Adriani, Paolo Vaccari), is located at a depth of 35 m, close to the *Scoglio della Scola*, in front of the east coast of the island. The site is characterized by the presence of about one hundred amphorae of different origin and epoch. The various amphorae range from *Dressel 1A* (1st century B.C.) to *Beltran 2 B* and *Dressel 20*, up to *African* models (3rd century A. D.) The site has been surveyed in 2001 by the *Nucleo Operativo Subacqueo* (MIBAC-SBAT) divers. This survey, carried out by the SBAT, proved that the site had remained untouched. And it was necessary to start a first test of excavation to know the exact nature of the archaeological site: this was one of the aims that the October 2006 underwater mission has reached.

The remarkable depth allows diving and the site was chosen to make survey using both robotic equipment and divers.

The experimental activity, under the supervision of the archaeological team of MIBAC-SBAT, has been carried out by CNRS for the photogrammetric survey, ISME with its own ROV equipped with camera from COMEX, and its georeferentiation and positioning system.

The site had to be cleaned before surveying, mainly because of the presence of dead posidonia. This first operation was made in September 2006 by SBAT including specialists from CH conservation: Roberto Bonaiuti and Emiliano Africano.

3 PHOTOGRAMMETRIC SURVEY IN PIANOSA

The survey is done merging several kinds of information: bathymetry, DTM from photogrammetry, artefacts measure with photogrammetry and theoretical model of artefact objects. The entire survey is stored in a relational database and the geometry is exported toward tools for Virtual Reality (see fig. 1). This approach will allow archaeologists to see the entire site, using immersive VR technologies, without diving. (Drap et al., 2005), (Long, 1996).

3.1 Two Different Ways for Data Capture

The photogrammetric survey in Pianosa is made by a set of photographs with the right overlap (around 60%). The geometry is very similar to the technique used in aerial photogrammetry; the main difference is the distance to the seabed and the immersion in water.

As we are sure that the seabed is more or less flat, we can use a set of photographs with vertical axis to make the survey.

The photographs are taken by strips with 60% overlap for the consecutive photographs in a strip and 20% overlap from one strip to another.

This first mission in Pianosa was an opportunity to test and improve several ways to perform this survey. As this site is 35m deep, we can use both a survey with divers (CNRS partner), and start a survey by ROV, managed by ISME. (Conte et al., 2006).

The diver has a Nikon™ D70 digital camera with a 14 mm lens from Sigma™ and two flashes Subtronic™. The digital camera was embedded in Subal™ housing with a hemispherical glass.

COMEX brought its digital camera equipped for connection to the ROV: a Nikon DH2, a 14 mm lens from Sigma™ and two flashes Nikon™, SB800. The housing and connector was made by COMEX with a flat glass. (See fig.2)

A zone to be surveyed has been determined by the team and equipped with 4 scale bar (2m) and a set of 15 makers (cement block 15x15x10cm) in order to define a network for a better ROV guidance.

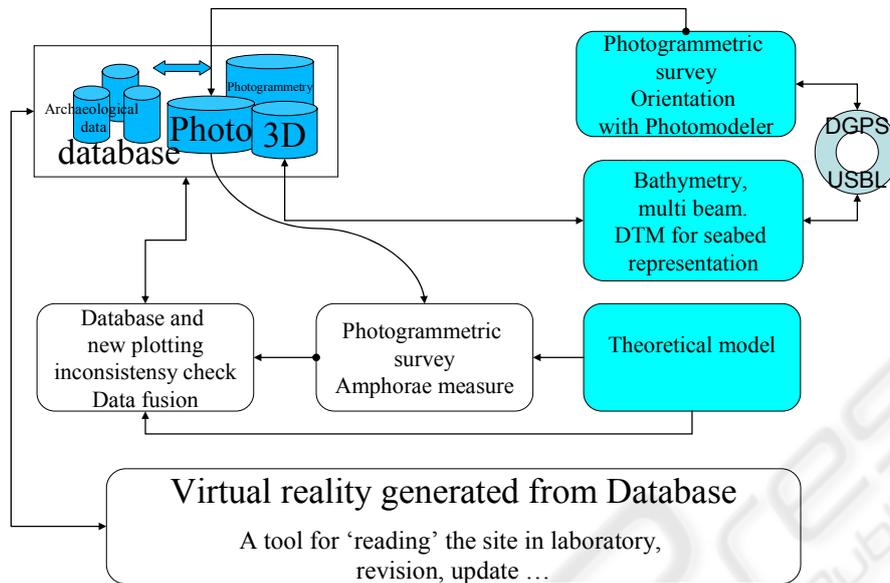


Figure 1: Synoptic schema of surveying process.

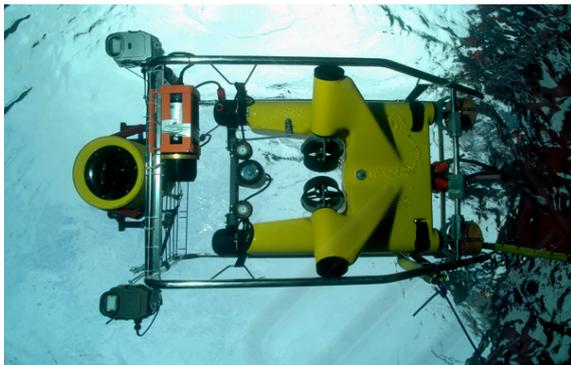


Figure 2: The ROV in water with digital camera and flashes in their housing.

The ROV has made a survey on the zone delimited by the markers. The pilot use a video camera located on the bow. He can see the markers and pilots in order to make strips. (Conte et al., 2007). The photographs were taken in two modes:

- Manually, an operator, looking through the lens by a small video camera to shoot the image.
- With a fixed frequency, decided according to the ROV speed and altitude.

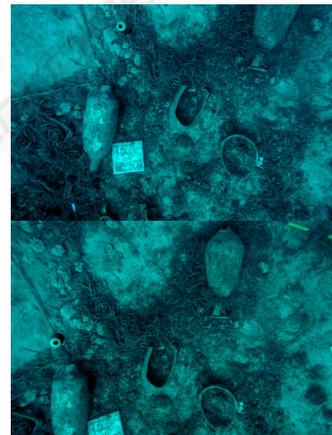


Figure 3: Two photographs from a strip made by the ROV.

3.2 Multimedia Calibration

The camera calibration in multimedia photogrammetry is a problem already identified since almost 50 years. (Bass and Rosencrantz, 1973), (ASP, 1980). You can refer to Hans-Gerd Maas (Maas, 1995-a) to have an overview of the state of art of this field. The problem is not obvious, the light beam refraction through the different dioptrics (water, glass, air) introduces a refraction error which is impossible to express as a function of the image plane coordinates alone. (Maas, 1995-b) Therefore

the deviation due to refraction is close to those produced by radial distortion even if radial distortion and refraction are two physical phenomena of different nature.

For this reason we start to use standard photogrammetric calibration software and make a calibration of the set housing + digital camera. The distortion corrects in a large part the refraction perturbation. This was also shown by Kwon (Kwon, 1998) (Kwon and Lindley, 2000).

But this approach is strongly dependent of the ultimate dioptr water/glass of the housing. To try to minimize the refraction error we can found on the market some housing with a hemispherical glass, which is the case of Subal™ housing used with the diver. For the other one, made by COMEX the glass was plate and the refraction action is much more important.

We have developed a method to compensate separately refraction and distortion; this is published as a deliverable of the VENUS project and is downloadable from the VENUS web site.

3.3 The Reference System

The choice of a reference system to express the measured data is very important. It's depending of the archaeological needs. Several cases can occur:

- We don't have any way to get an absolute position, or we don't need it. In this case we have to define the reference system on local, observable geometry. For example something which defines the axis of symmetry of the wreck (if there is one); buoys to define the vertical axis; scale bar.
- We need an absolute orientation and we have several ways to obtain it. For example a pipe line as DGPS – USBL can give an approximation of the ROV position, etc...

In Pianosa we will use an absolute reference given in two modes: when it will be possible ISME will associate for each photographs coming from the ROV six parameters as: x, y, z, Omega, Phi, Kappa. In the same time they will measure the absolute coordinates of a set of markers seen on the photographs and used as control points.

3.4 Orientation Phase

More than three hundred photographs have been taken by the diver. They cover an area of 20 x 20 meters. The orientation was done manually using Photomodeler™.

The photographs orientation was done using points on the seabed, except on the amphorae in order to be used to define a DTM on the seabed. The oriented photographs and the diver's trajectory are visible in figure 5.

Five markers, visible in figure 4, were used as control points.

3.5 Amphorae Plotting

Using the oriented photography a plotting phase, driven by archaeological knowledge is processed to obtain both 3D model representing the amphorae and a database managing all the data of the project.

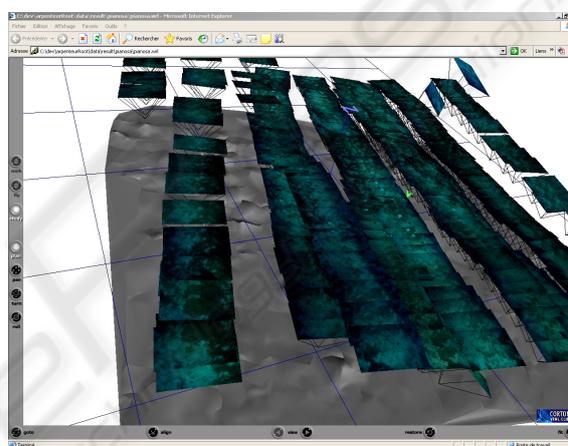


Figure 4: Oriented photographs visualised in VRML with the non textured seabed.

A Method for Measuring Amphorae. After the orientation phase we shall, in the next months, start the amphorae plotting phase. This second step will use archaeological knowledge to obtain a complete representation of the measured artefact; it will be articulated in three steps:

1) Development of the theoretical model: for each identified object, a geometrical description offers a whole of geometrical primitives, which are the only objects to be potentially measured, and a theoretical representation of the object. In our case archaeologists have identified six amphora typologies and we shall produce a theoretical model for each of them. This theoretical model is formalized in a hybrid way, taxonomy of archaeological artefacts and an XML representation for the Amphorae typology.

2) As photogrammetric measurements are highly incomplete (the object is seen only partially or may be deteriorated), an Expert System will determine the best strategy to inform provide all the geometri-

cal parameters of the studied object, starting from the measurement process and handling the default data as defined in the archaeological model and the geometrical model. The expert System used is Jess. (<http://herzberg.ca.sandia.gov/jess/>)

3) The resulting object is thus based on a theoretical model, dimensioned more or less partially by a photogrammetric measurement. During the exploitation of the photographs the operator can choose the number of attributes of the object which are relevant to measure. The choice of attributes will be revisable in time, as for example during a second serie of measurements. The system can be used to position in space some objects from a catalogue after a scaling process.

All these development are done in Java and connected to the Arpenteur photogrammetric toolbox. (Drap et al., 2003), (Drap and Long, 2005).

Measuring Paradigm Amphorae. In order to use the method describe above, the archaeologists have taken up six amphorae from the site. These amphorae will be used as paradigm to define the theoretical model needed. The first step is to measure the amphorae and to define a geometrical model. Some amphorae have been designed in a traditional way at scale 1:1, for some others as for example the type gauloise 3 we used the typology presented by our partner ADS Archaeological Data Service, University of York, UK.

(http://ads.ahds.ac.uk/catalogue/archive/amphora_ahrb_2005/details.cfm?id=135)

The Plotting Interface. The diversity of the objects handled by the archaeologists and the geometric complexity of their surfaces led us to search for stable morphological characteristics of the objects where diagnostic measurements could be taken. A series of simple geometric primitives are used to approximate these morphological characteristics and are used as an interface between the photogrammetric measurement and the underlying model.

In the case of amphorae we define four measurable zones, rims, handle, belly, bottom, and we use a set of geometrical primitives computed by least square method onto the measured points. For example a circle on the rim or belly points, a line on bottom point and center of these two circles.

This interface allows the user (generally an archaeologist) to

- Recognize the amphora type on the photographs,
- Choose the amphora type in the interface combo box (The site was already studied in

collaboration with archaeologists to define the typology),

- Measure a set of points on the zone where measure is allowed,
- Add archaeological comments and observations,
- Compute the object, using the measured points to construct a new instance of amphorae,
- Insure consistency between observations and theoretical model,
- Store this new instance in the remote database.

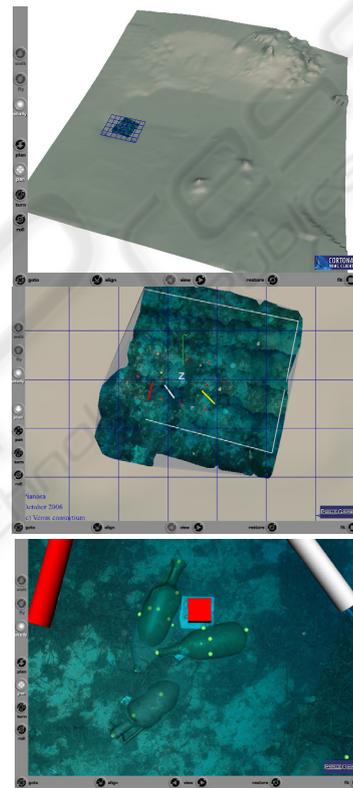


Figure 5: VRML representation of reconstructed amphorae. Also visible the measured points on amphorae, a marker and two scale bars. The seabed is textured using the oriented photographs.

4 MERGING RESULTS

We have merged the data coming from the bathymetry mission, conducted by *Geosystem Parma*, Italy, the photogrammetric campaign ie, a survey of the seabed at large scale with a good quality texture and a survey, driven by archaeological knowledge of all the amphorae and fragments of the site with a direct link from the Amphorae representation to the database. (see fig 9 to 11).

All these data now are stored in a relational database (MySQL) and a set of java tools allows to wrap objects from the database and to produce a VRML representation.

The VRML file produced contains a link for every amphora to the database via a PHP interface. This interface allows the user to see, check and modify the archaeological values regarding the amphorae. Of course the user has access to all the data, i.e. measuring points, photos and photo orientation used to measure the artefact, but these data are read only through this interface.

4.1 Seabed Representation

The textured seabed is obtained by triangulation of the points used to orient the photographs. We have developed a tool to link each triangle to a set of possible photographs for texturing with the current used photograph mentioned. The result (3D points, triangle, oriented photographs) are written in XML with possible transformation to X3D and VRML. This way is very convenient to change the photograph used to texture a triangle or a zone.

4.2 Accuracy

The bundle adjustment precision for all the photographs is around 2 cm and the relative uncertainty of measurement is less than 5mm when the signal is good. The absolute accuracy is around 40cm (using the control points given by the acoustic measurement from the ROV).

5 CONCLUSIONS AND FUTURE WORK

Archaeologists need to explore and make an inventory of deep wreck sites unreachable by divers as these sites may be jeopardized by deep trawling in the very next few years. The digital preservation aspect is one of the main goals of this project.

We have presented here the underwater survey process from taking photographs to the site reconstruction, merging acoustic and optical data, and a theoretical model based on archaeological knowledge for amphorae. In the framework of the VENUS project a work is in progress to define ontologies for underwater archaeology and more precisely for amphorae present on the site. (Jeansoulin and Pappini, 2007)

The measured object are stored in a database and wrapped in Java Objects able to generate their morphology in VRML.

In addition of the site survey presented here we plan to immerse archaeologists inside a virtual universe depicting a reconstructed archaeological site, for example a shipwreck, and allow them to work on this site as naturally as possible. The digital model generated by the survey will then be used, with the help of virtual reality and mixed reality, for constructing immersive, virtual environments that enable archaeologists and general public to experience an accurate and fully immersive visualization of the site. (Chapman et al., 2006).

The next VENUS mission in open sea is scheduled in October 2007. It's about a shipwreck, located at Sesimbra, near Sado river mouth, south of Lisbon, lying at a depth of 55m. It is yet possible to dive and we will use both divers and ROV to finally analyse our survey procedure. The ultimate mission in France, scheduled in October 2008, will be done completely diverless.

ACKNOWLEDGEMENTS

The Venus sea trial operations in Pianosa have been made possible thanks to the voluntary support of a number of different Institutions. In particular, the Italian Ministry of Internal Affairs - Corpo Nazionale dei Vigili del Fuoco - Direzione Regionale Vigili del Fuoco della Toscana - Nuclei Sommozzatori (Diving team of the Tuscany Fire Brigade) has made available the ship and diving teams for assistance in all the stages of the activities. The Italian Ministeries of Justice (Casa di reclusione di Porto Azzurro, Polizia Penitenziaria), of Transportation and Navigation, of the Environment (Parco Nazionale Arcipelago Toscano) have given the necessary permits and the required logistic assistance. The Cooperativa Ormeggiatori Piombino, Studio Archeologico Theys and Geosystem Parma have contributed in the data gathering process and with diving assistance.

VENUS is partially supported by the European Community under project VENUS (Contract IST-034924) of the "Information Society Technologies (IST) programme of the 6th FP for RTD".

The authors are solely responsible for the content of this paper. It does not represent the opinion of the European Community, and the European Community is not responsible for any use that might be made of data appearing therein.

REFERENCES

- Paul Chapman, et al. *VENUS, Virtual ExploratiON of Underwater Sites*. in *VAST/CIPA The 7th International Symposium on Virtual Reality, Archaeology and Cultural Heritage*. 2006. Nicosia, Cyprus: Archaeolingua, Budapest, Hungary.
- Pierre Drap, et al. *Vual Reality in underwater archaeology: First results on the case study "L'Anse des Catalans", Marseille*. in *VSMM2005 Eleventh International Conference on Virtual System and Multimedia*. 2005. Ghent, Belgique.
- Luc Long. *L'archéologie sous-marine à grande profondeur: fiction ou réalité*. in *Archeologia Subacquea, Come opera l'archeologo sott'acqua, Storie dalle acque, VIII ciclo di lezioni sulla ricerca applicata in archeologia, Certosa di Pontignano*. 1996. Siena, Italia.
- Giuseppe Conte, et al. *Robotics tools for underwater archaeology*. in *ECSAC07 VII International Conference on Science, Arts and Culture. Science for Cultural Heritage*. 2006. Veli Lošinj, Croatia.
- Giuseppe Conte, et al. *Data gathering in underwater archaeology by means of a remotely operated vehicle*. in *XXI CIPA international Symposium*. 2007. Athens, Greece: *The CIPA / VAST*, Nicosia, Cyprus.
- Georges F. Bass and Donald Rosencrantz. *L'utilisation des submersibles pour les recherches et la cartographie photogrammétrique sous-marine*. in *L'archéologie subaquatique, une discipline naissante*. 1973. Paris.
- ASP, *Manual of photogrammetry, Fourth Edition*. 1980: American Society of Photogrammetry (Asprs Pubns).
- Maas, H.-G. *New developments in Multimedia Photogrammetry*. in *Optical 3-D Measurement Techniques III*. 1995: Wichmann Verlag, Karlsruhe.
- Hans-Gerd Maas. *New developments in Multimedia Photogrammetry*. in *Institute of Geodesy and Photogrammetry, Swiss Federal Institute of Technology*. 1995. Zurich.
- Kwon, Y.-H. *Refraction at the Water-Air Interface*. 1998 (cited; Available from: <http://kwon3d.com/theory/dlt/refr.html>).
- Kwon, Y.-H. and S. Lindley, *Applicability of 4 Localized-calibration Methods in Underwater Motion Analysis*. XVIII International Symposium on Biomechanics in Sports., 2000.
- Pierre Drap, Julien Seinturier, and Luc Long. *A photogrammetric process driven by an Expert System: A new approach for underwater archaeological surveying applied to the 'Grand Ribaud F' Etruscan wreck*. in *Applications of Computer Vision in Archaeology ACVA'03* 2003. Monona Terrace Convention Center, Madison, Wisconsin, USA.
- Pierre Drap and Luc Long, *Photogrammètrie et archéologie sous-marine profonde. Le cas de l'épave étrusque Grand Ribaud F XYZ*, 2005. N°103, partie 1 et N° 104, partie 2.
- Robert Jeansoulin and Odile Papini. *Underwater archaeological knowledge analysis and representation in the VENUS project: a preliminary draft*. in *XXI CIPA international Symposium*. 2007. Athens, Greece.